

Thank you for purchasing a National Cycle® product. Please read these instructions carefully and thoroughly before beginning work. Dealers if installing this product for a customer please give them this manual. It contains information needed to properly maintain and use this product.

<p>Attention</p>  <p>Special notes and cautionary measures which can prevent damage to the accessory or motorcycle.</p>	<p>Note</p>  <p>Tips for facilitation of operation, control and adjustment, as well as maintenance.</p>
--	--

PARTS LIST

Item	Description	Qty.
1	37-375460-000 Chain Guard, Black Anodized	1
BAG #1003		
2	55-536200-000 Screw, Pan, M5 x 16	2
3	49-490580-000 Washer, Flat, Nylon	2
4	15-150007-000 Loctite® .5ML	1



PREPARATION and REMOVAL OF PARTS

1. Remove the stock chain guard. Parts will not be re-used.
Figure 1 (T25 Torx Wrench)



Figure 1

INSTALLATION

1. Angle the ZTechnik Chain Guard as shown in figure 2 and slip the chain guard between side cover and wheel.
2. Remove the screws from Bag #1003 and apply a small amount of Loctite thread locker onto the end of each screw.
3. Install the Chain Guard using the screws and washers from Bag #1003. Washer is placed on the INSIDE of the Guard.
Figure 3 (T25 Torx Wrench)
4. Tighten screws firmly.



Figure 2

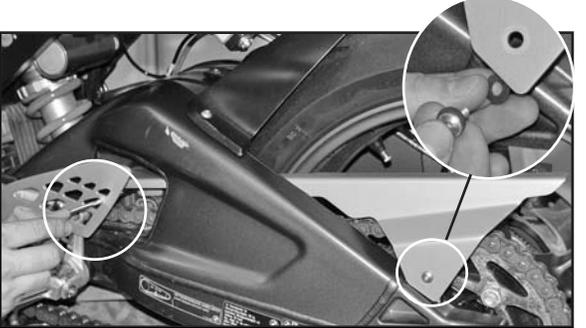


Figure 3

MAINTENANCE

To clean the Chain Guard, wash with a clean soft cloth, plenty of warm water and if necessary, a non-abrasive soap such as dishwashing liquid.